


Central Loose Tube Outdoor Cable

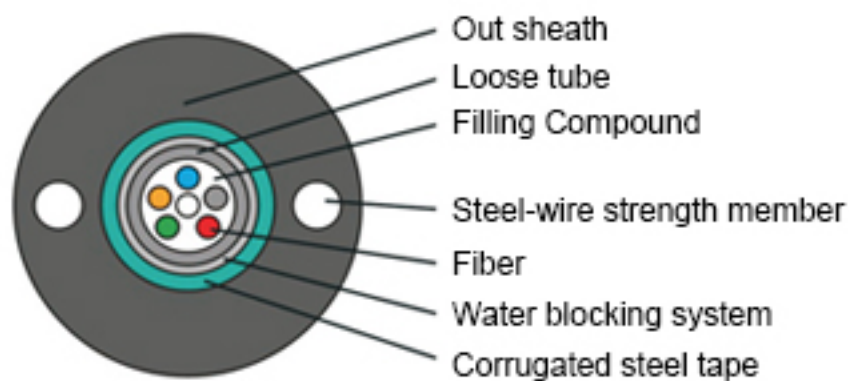

Application

- Adopted Outdoor distribution.
- Suitable for aerial pipeline laying method.
- Long distance and local area network communication.

Characteristics

- Steel-wire parallel member .filler protects tube fiber steel tape amored.
- Excellent mechanical and environmental performance.
- Compact structure .light weight.

Technical Parameters :

Cable Count	Out sheath Diameter (MM)	weight (KG)	Minimum allowable Tensile strength (N)		Minimum allowable Crush Load (N/100mm)		Minimum Blending Radius (MM)	
			Short term	Long term	Short term	Long term	Short term	Long term
2	8.3	78.0	1500	600	1000	300	20D	10D
4	8.3	78.0	1500	600	1000	300	20D	10D
6	8.3	78.0	1500	600	1000	300	20D	10D
8	8.3	78.0	1500	600	1000	300	20D	10D
10	8.3	78.0	1500	600	1000	300	20D	10D
12	8.3	78.0	1500	600	1000	300	20D	10D